

CONSTRUCTIVE-FUNCTIONAL ANALYSIS AND SIZING OF HYDRAULIC FILTERS

Nicușor BAROIU¹, Georgiana Alexandra MOROȘANU¹

¹Department of Manufacturing Engineering, “Dunărea de Jos” University of Galați, România
 email: Alexandra.Costin@ugal.ro

ABSTRACT

The reliability of hydrostatic installations depends on the low level of impurities in an environment with pressure at an allowable value, which avoids an accentuated wear of the individual elements of the installations. Hydraulic filters are elements that have a role in protecting the hydrostatic installations from the particles that are found in the hydraulic oil. The paper aims to present some of the elements underlying the construction of hydraulic environment filtration equipment, certain conditions that are imposed on them, as well as the main problems related to the calculation and sizing of filters.

KEYWORDS: filters, filtering surface, filter elements, sizing of filters.

1. INTRODUCTION

The good functioning of the hydraulic systems, but also the maintenance of the initial performances, depends to a large extent on the degree of purity of the hydraulic fluid. Impurities cause, by their nature, the erosion of the elements in contact, the gripping of the moving elements, the clogging of the orifices, as well as the chemical degradation of the engine agent [1-3].

Figure 1 shows several types of filters.



Fig. 1. Types of filters [4]

Filters found in hydrostatic installations, Figure 2, are subject to certain conditions [1]:

- to have the capacity to retain impurities with different dimensions;
- to present the possibility of fast and periodic cleaning of the filter element;
- to allow easy replacement of the filter element;

- to present the possibility to control the operation of the filters;
- to ensure the protection of the installation in case of clogging of the filter element.

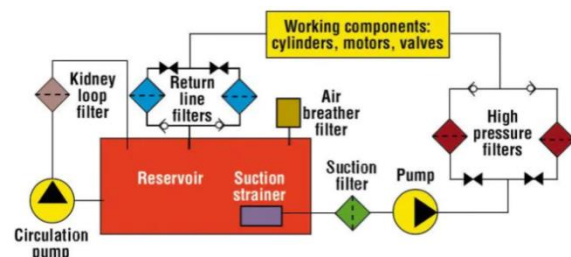


Fig. 2. Filter configuration [5]

The main element in the construction of filters is the filter element, while the filtering method consists in forcing the agent to pass through it.

The classification of filters is shown in Figure 3.

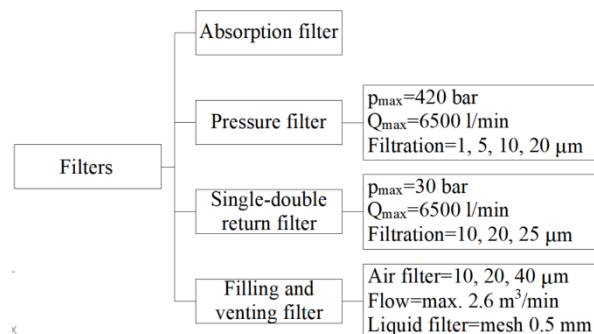


Fig. 3. The classification of filters [6]

Impurity classes indicate how many particles of a certain size are contained in 100 ml of hydraulic fluid. The determination of the impurity class is done by counting and classifying the size of the impurity particles. Starting with a concentration of impurities of about 10 mg/liter or in a very strong liquid disorder, the degree of impurity can only be ascertained by determining the weight of the impurities by gravimetric analysis [7,8].

In a hydraulic system, the most sensitive components to impurities are servo valves and proportional valves. Therefore, they determine the total impurity classes of the hydraulic oil and the required filtration fineness.

2. STRUCTURE OF IMPURITY CLASSES

ISO 4406:2021 (Hydraulic fluid power-Fluids-Method for coding the level of contamination by solid particles) regulates the classification systems of impurity classes in hydraulic oils.

Figure 4 indicates the particle sizes on the X-axis and on the Y-axis, the number of particles is written and they are divided into classes 1-20. The line drawn on the diagram describes the distribution of particles in the hydraulic oil. The ascending slope of the line is determined by the entry of the particle size of 5 μm and 15 μm.

By determining the class number for 5 μm particles and 15 μm particles, the particle distribution line is described.

For example, for servo valves and proportional valves, the following oil purity is required: servo valves (13/10) - red curve; proportional valves (17/14) - blue curve [7].

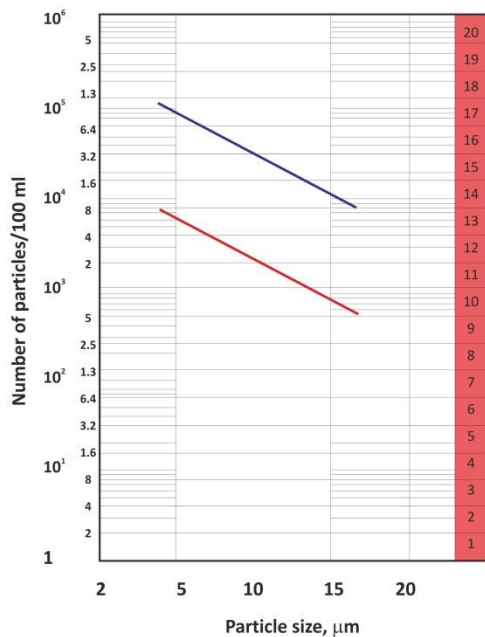


Fig. 4. Purity class structure according to ISO 4406:2021

Thus, the individual particle sizes are comprised of 5 domains. For each domain, a maximum particle quota is indicated for each class, Table 1.

For example, the purity required for oil, according to the NAS 1638 standard, developed in order to define the levels of contamination in the aerospace sector [7], is servo valves: from 4 to 6 (red domain), respectively proportional valves: from 8 to 9 (blue domain).

Table 1. Structure of purity classes (NAS 1638)

Class	Maximum number of impurity particles in 100 ml of hydraulic fluid at particle size				
	μm				
	5-11	15-25	25-50	50-100	>100
00	125	22	4	1	0
0	250	44	8	2	0
1	500	89	16	3	1
2	1000	178	32	6	1
3	2000	356	63	11	2
4	4000	712	126	22	4
5	8000	1425	253	45	8
6	16000	2850	506	90	16
7	32000	5700	1012	180	32
8	64000	11400	2025	360	64
9	128000	22800	4050	720	128
10	256000	45600	8100	1440	256
11	512000	91200	16200	2880	512
12	1024000	182400	32400	5760	1024

A parameter, called the β_x value, serves as a standard for restraint speed of impurities (filtration fineness). In general, the β_x value always refers to particles that are larger than the observed X particle size.

Impurity particles counted before the filter element of a certain particle size X are divided by the impurity particles counted after the filter element (same particle size X at the same differential pressure counted at the same time point).

The non-dimensional number obtained represents the value of β_x . The representation of the deposition of impurity particles through the filter elements is shown in Figure 5.

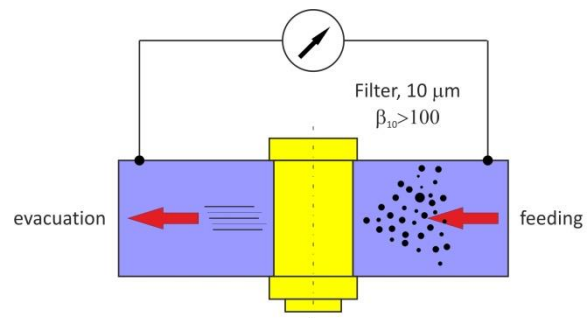


Fig. 5. The representation of the deposition of impurity particles through the filter elements

Example of a number of measured particles:
 - feeding flow: 10000 particles in 100 ml;
 - evacuation flow: 100 particles in 100 ml.

$$\beta_3 = \frac{n_{z \text{ feeding flow}}}{n_{z \text{ evacuation flow}}} = \frac{10000}{100} = 100, \quad (1)$$

$\beta_3 = 100 = 99\%$ (also called separation degree).

The indication of the β_x value indicates the precipitation behavior (yield) of the filter element. The advantage is that the domain between 90% and 100% precipitation degree can be greatly expanded. Once the β_x value is defined, taking into account the differential pressure that is formed, it is possible to compare the indications of filter fineness according to different filter materials.

Definitions are accepted for the filter fineness [9]:

1. nominal filtration fineness - no usual β_x values are established; this means that only part of the filterable impurities with an optimal filter is removed by filtration. For $\beta_x \geq 20$ - this corresponds to a precipitation degree of about 95%;
2. absolute filtration fineness - from a value of $\beta_x \geq 100$ or a precipitation degree of 99%, the filtration fineness is designated as absolute retention speed.

A hydraulic filter element represents a device that is designed to eliminate contaminants in fluids [10].

In most cases, these contaminants come from:

- recirculation of hydraulic fluid through tanks;
- internal generation of particles in the components of the hydraulic system, such as pumps and motors.

3. CONSTRUCTIVE ELEMENTS OF FILTERS

The filter elements are mounted in the housing, the construction which depends on the nature, size, and shape of the filter element and the destination of the filter. Therefore, some of the most used filter elements are [1]:

a. filter elements with wire mesh (Figure 6) have a filtration fineness in the range 60÷500 μm .

It is presented in the form of a cylindrical cartridge or superimposed rings, made of brass or copper wire, with a number of 3000÷20000 per cm^2 .

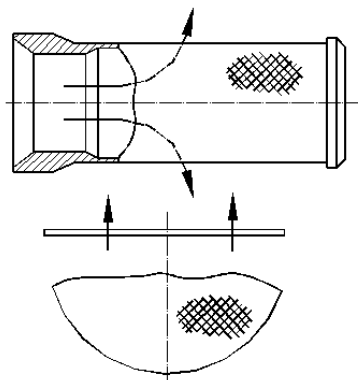


Fig. 6. Filter element with wire mesh

b. filter elements with slats (Figure 7) have a filtration fineness of 16÷250 μm .

They consist of the discs (2) and the spacer slats (3), arranged intercalated on an axis (1). The thickness of the spacer slats ensures gaps of $\delta_l = 0.005-0.1 \text{ mm}$, the thickness δ of the discs being 0.1÷0.2 mm.

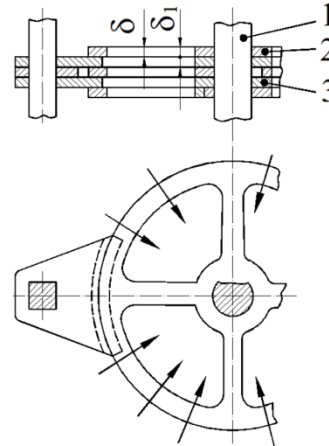


Fig. 7. Filter elements with slats

c. paper filter element has a filtering fineness between 10 and 25 μm .

It is presented in the form of overlapping rings or cylinders made of embossed (folded) paper, thus increasing the contact surface between the fluid and the filter element (filter surface);

d. sintered powder filter elements have a filtration fineness between 2 and 10 μm , retaining impurities of any kind, with dimensions of 3÷5 μm , in the proportion of 100%.

It is presented in the form of a glass, cylinder, Figure 8, or overlapping rings, obtained by pressing in specific shapes at high pressures (1000÷3000 bar) of bronze, steel, ceramic materials, followed by ripening (sintering) in the oven.

The size of the pores (1) obtained by sintering represents 10% of the diameter of the initial powder granules.

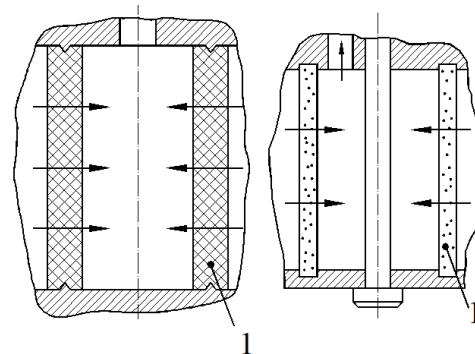


Fig. 8. Sintered powder filter element

e. filter elements with magnets - retain particles with magnetic properties; permanent magnets (ceramics) or electromagnets are used.

The magnet (1), Figure 9, is protected from direct contact with the fluid through the coating (2).




Fig. 9. Filter element with magnets

g. electrostatic filter elements, Figure 10 - used to electrify impurity particles (1) in an electrostatic field created by two electrodes (2), connected at a voltage of 300÷600 V.

The electrodes attract and retain the electrified impurities, being covered with a ceramic material (3) in order to avoid their neutralization.

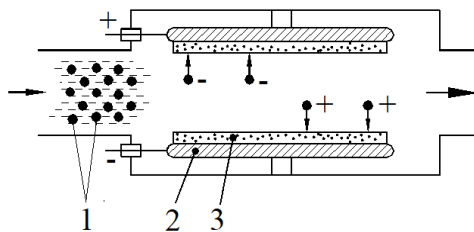


Fig. 10. Electrostatic filter element

h. centrifugal filter elements- filter by throwing (centrifuging) the particles of impurities on the wall of the housing under the action of the centrifugal force created by rotating the axis with high speed. The fineness of the filtration depends on the rotational speed, which can reach a value of 5 μm for a speed of 20000 rpm. Such constructions are used to filter important fluid flows.

The construction of a filter with filter element with wire mesh is presented in Figure 11.

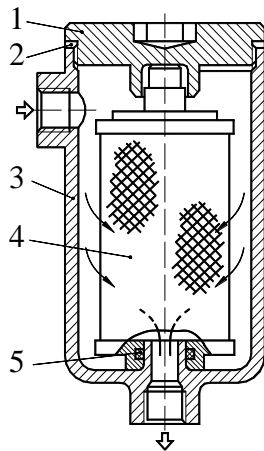


Fig. 11. Filter with wire mesh: 1 - lid; 2 - gasket; 3 - body; 4 - filter element; 5 - sealing gasket.

In the simple version, they have a single mesh and in the combined version they have several meshes.

Periodic cleaning of the filter involves the removal and unclogging of the filter element or its replacement with a new one.

Usually, in hydraulic installations, magnetic filters, Figure 12, are used as complementary filters. They only separate metallic impurities with magnetic properties. When passing through the filter, the fluid is forced to flow through the collecting rings (5), so that the respective impurities are attracted and retained by the magnetic core (4).

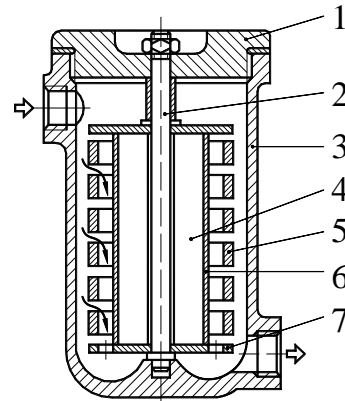


Fig. 12. Magnetic filter: 1 - lid; 2 - fixing rod; 3 - body; 4 - permanent magnet; 5 - collecting rings; 6 - protective coating for magnet; 7 - fixing thaler.

4. FILTER INSTALLATION SOLUTIONS

The installation of filters in hydraulic circuits can be done in several variants [1]:

- a. suction filter or low pressure filter, Figure 13.a;
- b. high-pressure filters, Figure 13.b;
- c. filter on the exhaust pipe from the engine or return filter, Figure 13.c;
- d. return filter with protection, Figure 13.d;
- e. filter on a special secondary circuit, Figure 13.e.

A suction filter or low pressure filter, Figure 13.a, is usually made of mesh type with a fineness of 100÷200 μm. It has the role of protecting the pump and must have a pressure drop Δp as low as possible, in order to avoid the cavitation phenomenon of the pump.



Fig. 13.a. Filter installation solutions: suction filter or low pressure filter [11]

Pressure pipe filter or high pressure filter, Figure 13.b, is usually made of mesh or slats type but

especially of sintered powders with a filtration fineness of $2\div 10\ \mu\text{m}$.

This filter aims to protect precision hydraulic devices such as speed regulators, servo valves, etc.



Fig. 13.b. Filter installation solutions: pressure pipe filter or high pressure filter [12]

The filter solution on the exhaust pipe from the engine or return filter, Figure 13.c, is often used as the position in the circuit and allows them to drop pressure more than the suction filters. They have the disadvantage of worsening the energy balance. They are usually of mesh or paper type, with a fineness of $10\div 40\ \mu\text{m}$.

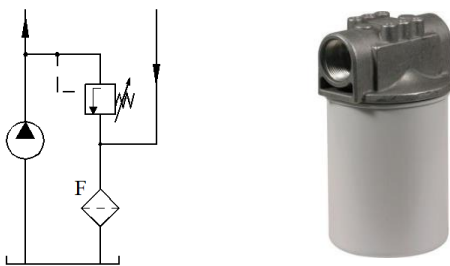


Fig. 13.c. Filter installation solutions: filter on the exhaust pipe from the engine or return filter [13]

The solution of the return filter with protection, Figure 13.d, also involves the installation of the filter on the evacuation pipe from the engine. When the filter is clogged, the increase in pressure drop could damage it and can be prevented by opening the bypass valve (S). As the filter is switched off in this case, the system remains unprotected from this point of view.

For this, it is recommended to use special devices to indicate the clogging of the filter element that warns and indicates the need for intervention in order to clean or change the filter element.

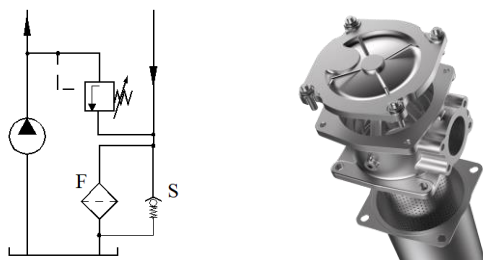


Fig. 13.d. Filter installation solutions: return filter with protection [8]

The solution of the filter on a special secondary circuit, Figure 13.e, involves the installation of a return

filter (F) on the pump circuit (P2) which permanently recirculates the liquid from the tank (R) in order to purify it.

This is the case for complex installations, but the solution does not eliminate the need for the main circuit of the pump (P1) to have its own filters.

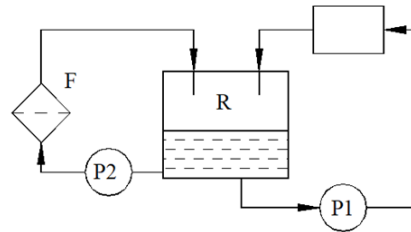


Fig. 13.e. Filter installation solutions: filter on a special secondary circuit

5. FILTER SIZING

The calculation of the filters consists in determining the filtering surface S of the filter element, using the relation [1]:

$$S = 0,01 \frac{Q}{\alpha \cdot \Delta p} \cdot \eta \text{ [cm}^2\text{]}, \quad (2)$$

where:

- Q is the fluid flow in l/min ;
- η - dynamic viscosity of the fluid, in $10^{-3} N \text{ sec} / m^2$.
- α - coefficient of the specific capacity of the fluid to pass through the filter element, in l/cm^2 .
- Δp - pressure drop in the filter, in bar.

The value of the coefficient α depends on the type of filter element, Table 2.

Table 2. The value of the coefficient α depending on the type of filter element

Filterelement type	α
Cotton	$\alpha_1 = 0.009$
Felt	$\alpha_2 = 0.015$
Wire mesh	$\alpha_3 = 0.05$
Slats with a thickness of $0.05\div 0.08\ \text{mm}$	$\alpha_4 = 0.08$

Therefore, four types of filtering surface S of the filter element will be calculated according to parameter α :

$$S_1 = 0,01 \frac{Q}{\alpha_1 \cdot \Delta p} \cdot \eta \text{ [cm}^2\text{]}, \quad S_2 = 0,01 \frac{Q}{\alpha_2 \cdot \Delta p} \cdot \eta \text{ [cm}^2\text{]},$$

$$S_3 = 0,01 \frac{Q}{\alpha_3 \cdot \Delta p} \cdot \eta \text{ [cm}^2\text{]}, \quad S_4 = 0,01 \frac{Q}{\alpha_4 \cdot \Delta p} \cdot \eta \text{ [cm}^2\text{]},$$

The values for a flow Q necessary for the operation of a hydrostatic motor will be chosen arbitrarily and, depending on one of the installation solutions presented in Figures 13.a÷13.e, the surface of the filter element will be calculated.

Also, the dynamic viscosity of the fluid, η , and the pressure drop in the filter, Δp , will be chosen arbitrarily, considering that the parameter η will be between the limits $2.5 \div 5 \text{ daN}\cdot\text{s/m}^2$ and Δp between $0.5 \div 3 \text{ bar}$.

Therefore, the input data for the calculation of the filtering surface S are presented in Table 3.a and Table 3.b. The results for data 1÷10 and 11÷20 corresponding to Table 3.a and Table 3.b are presented graphically in Figure 14 and Figure 15.

Table 3.a. The input data for the calculation of the filtering surface S

No.	Q [l/min]	η [daN·s/m ²]	Δp [bar]
1	56	2.8	1.3
2	60	4	2.1
3	52	3.2	0.5
4	48	3.6	2
5	50	3.1	1
6	58	2.9	0.7
7	40	3.3	1.4
8	45	3.4	1.6
9	54	3.7	1.7
10	47	3.5	0.6

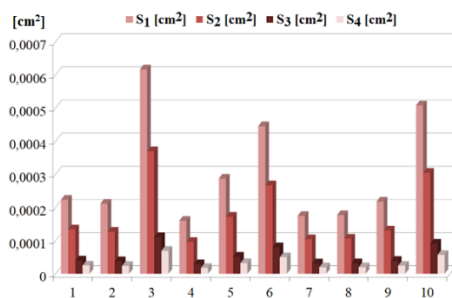


Fig. 14. The results of filtering surfaces calculation, S for data 1÷10 corresponding to Table 3.a

Table 3.b. The input data for the calculation of the filtering surface S

No.	Q [l/min]	η [daN·s/m ²]	Δp [bar]
11	42	3.8	0.9
12	49	2.6	1.8
13	57	3	2.5
14	53	2.7	2.2
15	41	2.3	0.8
16	59	3.9	2.4
17	51	2.5	1.5
18	46	3	1.2
19	55	3.2	1.9
20	43	2.7	2.3

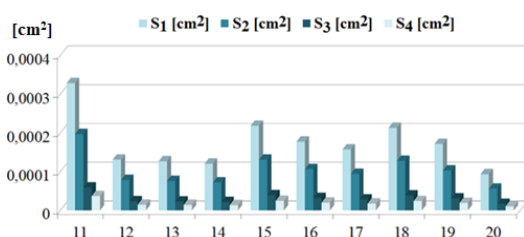


Fig. 15. The results of filtering surfaces calculation, S for data 11÷20 corresponding to Table 3.b

6. CONCLUSIONS

The choice of the material of the filter element is the basis of the construction of the filtering equipment of the hydraulic environment and has a specific influence on the problems related to the calculation and sizing of the filters.

The paper presents a way of calculating the surface of the filter element, by arbitrarily choosing the values for a flow Q necessary for the operation of a hydrostatic motor. Depending on this parameter, the flow rate Q , and the permissible pressure drop Δp , a filter of a certain type will be chosen from the catalog of manufacturing companies.

ACKNOWLEDGEMENTS

This work is supported by the project *ANTREPRENORDOC*, in the framework of Human Resources Development Operational Programme 2014-2020, financed from the European Social Fund under the contract number 36355/23.05.2019 HRD OP /380/6/13 - SMIS Code: 123847.

REFERENCES

- [1] Baroiu, N., Vișan, D., Ciocan, O.D., *Hidrostatică și pneumatică tehnologică* - Îndrumar pentru laborator - format electronic, Ed. Academica, ISBN 978-606-606-007-3, 2018;
- [2] Hujo, L., Jablonický, J., Markovic, J., Tulík, J., Simikic, M., Zastempowski, M., Janoušková, R., *Design of Laboratory Test Equipment for Automotive Oil Filters to Evaluate the Technical Life of Engine Oil*, Appl. Sci. 11:483, 2021, <https://doi.org/10.3390/app11020483>;
- [3] Momin, T., Chandrasekar, R.P., Balasubramanian, S., Junaid Basha, A.M., *Design and Analysis of High Pressure Hydraulic Filter for Marine Application*, IOP Conf. Series: Materials Science and Engineering 197, 012050, doi:10.1088/1757-899X/197/1/012050, 2017;
- [4] Donaldson, *Assemblies*, <https://www.donaldson.com/en-be/engine/filters/products/hydraulics/assemblies/>;
- [5] *Hydraulics & Pneumatics, Which hydraulic filters are most effective?* [https://www.hydraulicspneumatics.com/technologies/hydraulic-filters/article/21883277/which-hydraulic-filters-are-most-effective](https://www.hydraulicspneumatics.com/technologies/hydraulic-filters/article/21883277/which-hydraulic-filters-are-most-effective;);
- [6] Schmitt, A., *The Hydraulic Trainer: Instruction and Information on Oil Hydraulics*, Mannesmann Rexroth, 1980;
- [7] Dorr, H., Ewald, R., Hutter, J., Kretz, D., Liedhegener, F., Schmitt, A., *Hydraulic Trainer, Volume 2: Proportional and Servo Valve Technology Hardcover*, ISBN 3-8023-0898-0, 1986;
- [8] Exner, H., Freitag, R., Geis, H., Lang, R., Oppolzer, J., Schwab, P., Sumpf, E., *Der Hydraulik Trainer - Grundlagen und Komponenten der Fluidtechnik Hydraulik*, Der Hydraulik Trainer Band 1, ISBN: 3802306198, 1991;
- [9] Gebhardt, N., Weber, J., *Hydraulik - Fluid-Mechatronik: Grundlagen, Komponenten, Systeme, Messtechnik und virtuelles Engineering*, Springer-Verlag, ISBN 978-3662-60663-6, 2020
- [10] Indiamart, *Hydraulic filter*, <https://www.indiamart.com/proddetail/hydraulic-filter-5757787248.html>;
- [11] Hebei Huilong Hydraulic Machinery Co., Ltd., *Low pressure filters*, <http://filter-manufacture.com/1-3-low-pressure-filters.html>;
- [12] MP Filtri, *In-line filters > 80 bar (high pressure)*, <https://www.mpfiltri.com/prodotti/hydraulic-filtration-1/in-line-filters-80-bar-high-pressure-11/>;
- [13] Indiamart, *Hydraulic return filter*, <https://www.indiamart.com/proddetail/hydraulic-return-filter-14096680133.html>;
- [14] UFI Filters, *Return filters*, <https://www.ufihyd.com/products/return-filters/>.